

Top features

- 5 Power and 4 CCT field-adjustable.
- Selectable direct-Indirect light distributions.
- Fast and seamless continuous runs available.
- L/T/X connectors available.
- Multiple mount methods.
- Sensor solution ready.
- EM available on 4ft and 8ft models.




Fast and seamless connection

Screw-free to remove end-cover.
Tool-free press lock connection.



Distributions

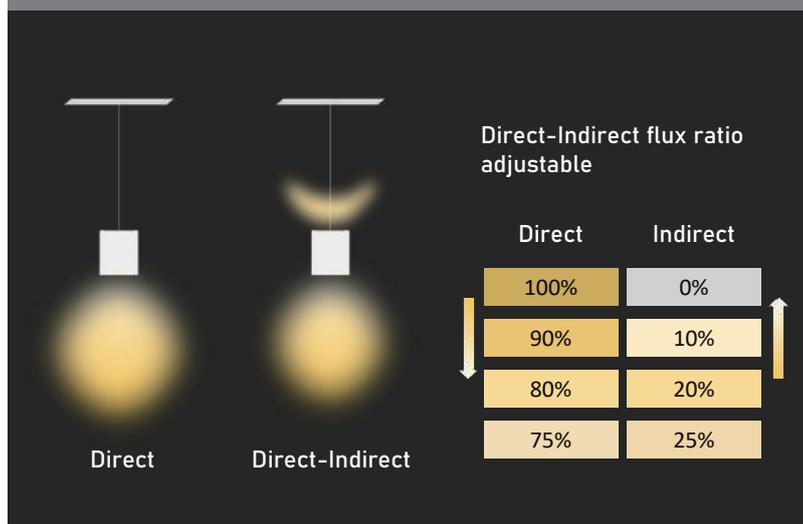

Specifications

UL Listing:
Suitable for damp locations

LEDs:
Long-life, high-efficacy, micro-power LEDs

Lifespan:
Lumen Maintenance, L70 > 100,000 hours

Housing and Lens:
Aluminium, PC lens




Ambient Operating Temperature:
-20°C (-4°F) to 50°C (122°F)^[2]

Driver:
Driver includes dimming control wiring for 0-10V dimming systems. Flicker < 10%.


CRI > 80 default, CRI > 90 optional.

Dimensions

Length

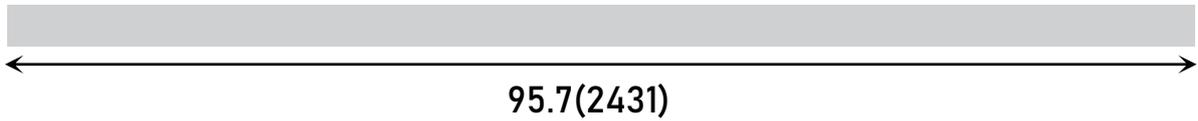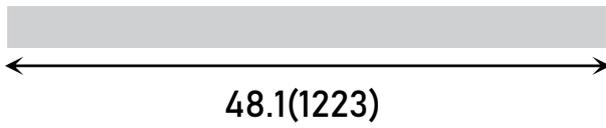



Height and Width




Size unit: inch(mm)

Mounting

Suspended mount, surface mount, wall mount, are available with accessories(purchase separately).

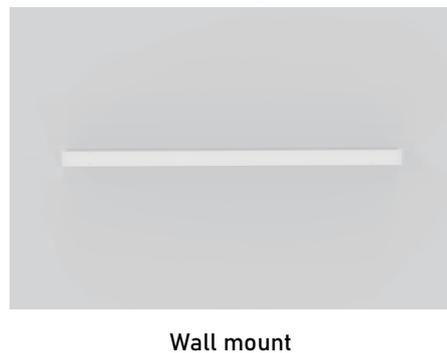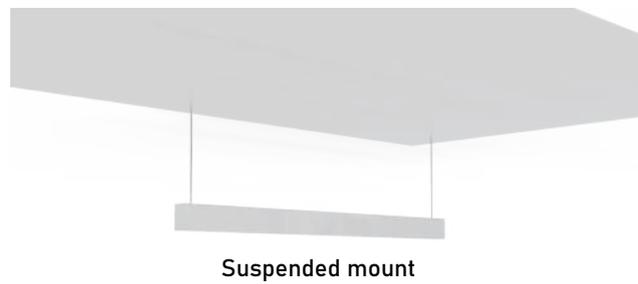

Connections

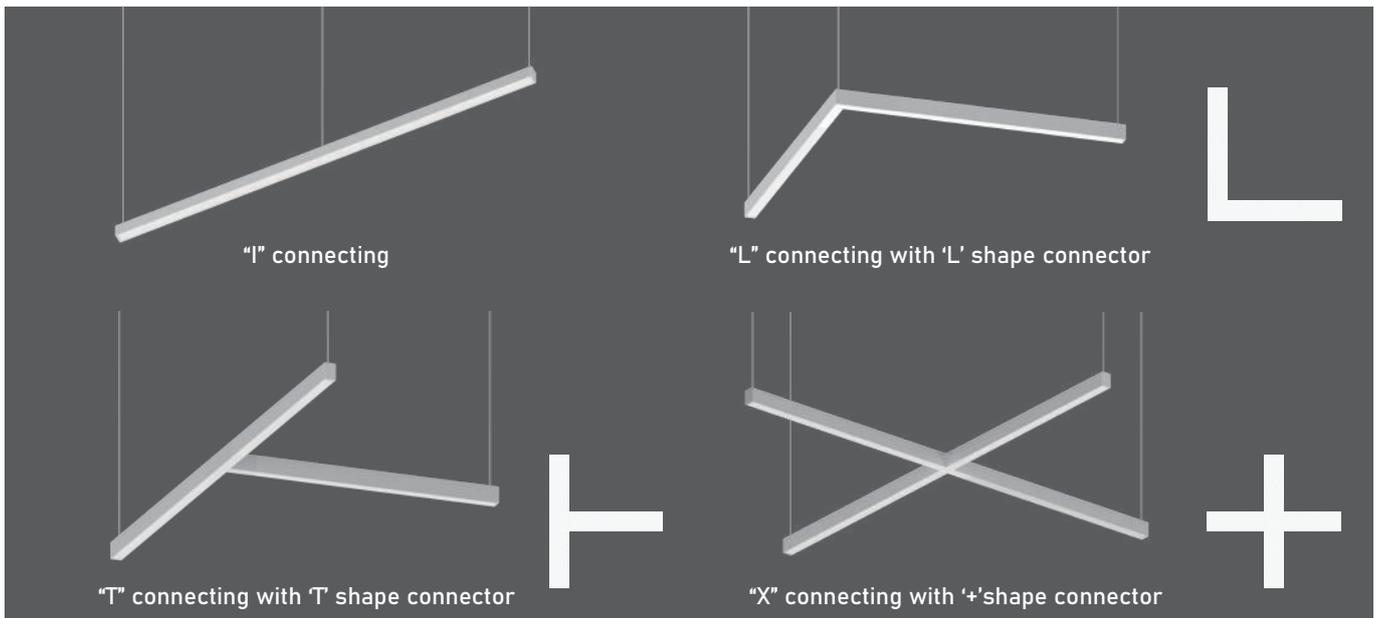


Change to DIY soft lens which can be cut by end-users for seamless continuous runs. Total connected load is $\leq 800W$ at 120V and $\leq 1600W$ at 277V which included the connectors.

Selectable table




Power & CCT & Direct-indirect flux ratio field-adjustable

Catalog No.	Input Wattage(W)	Lumens Rated(lm)	Efficacy Rated	CCT
LF-2FT-25W-L-H	15W-18W-20W-23W-25W	1800/2160/2400/2760/3000	120lm/W	6500K-5000K-4000K-3500K
LF-4FT-50W-L-H	30W-35W-40W-45W-50W	3600/4200/4800/5400/6000	120lm/W	
LF-8FT-80W-L-H	60W-65W-70W-75W-80W	7200/7800/8400/9000/9600	120lm/W	

Connectors dimensions

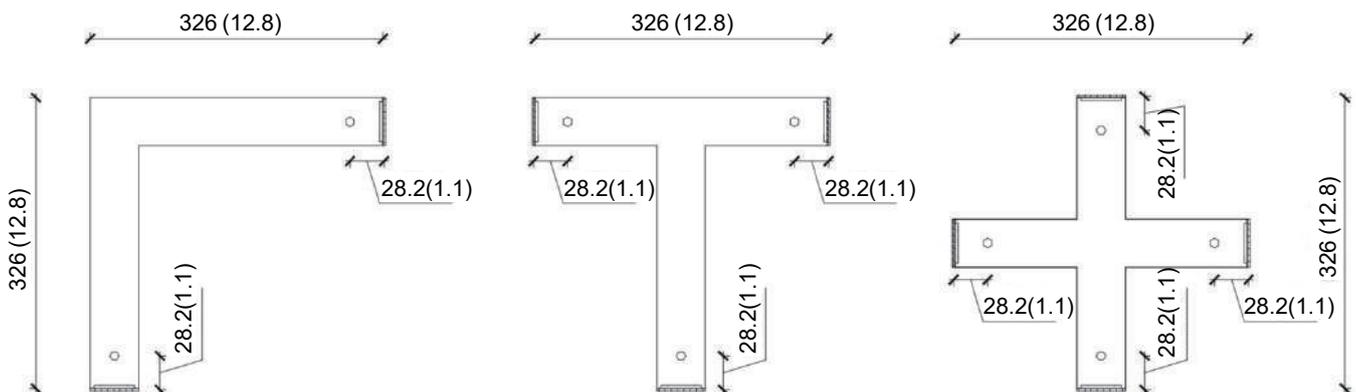

Installation accessories
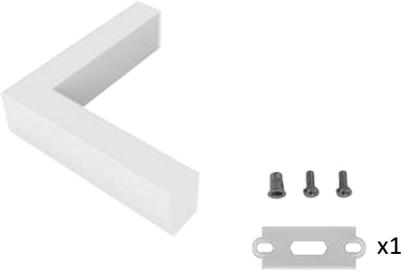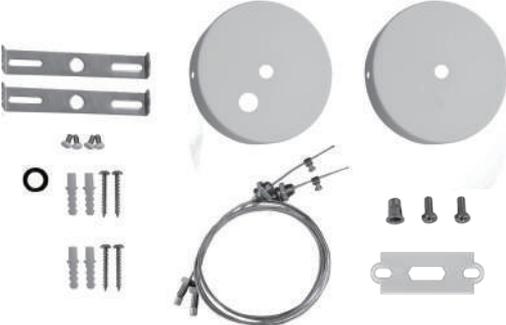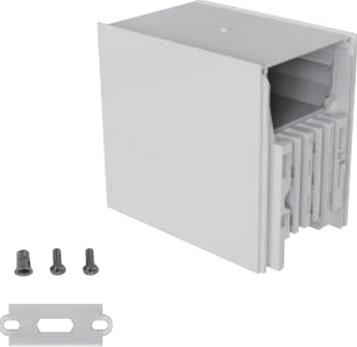
<p>'L' connector</p> 	<p>'T' connector</p> 	<p>'X' connector</p> 
<p>Suspension mount kit</p> 	<p>Cable kit for connection</p> 	<p>Power cord</p> 
<p>DC sensor installation kit</p> 	<p>AC sensor installation canopy kit(sensor installed)</p> 	<p>Soft DIY-cut diffuser, 49.2' length per roll</p> 

Note: Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.